


tecniiwell



TW 100-E 45 kW

ELECTRIC HIGH FLOW TRIPLEX PUMP



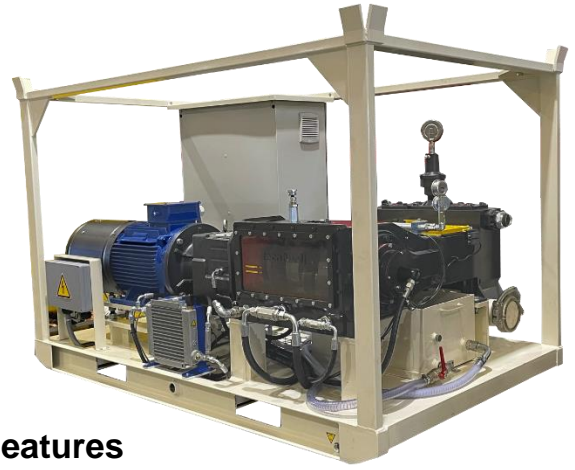

Technical Features

Variable frequency drive (VFD) / entraînement à fréquence variable / <i>Frequenzumrichter</i>	From 5Hz to 75Hz		
Electric motor / moteur électrique / <i>Elektromotor</i>	45 kW	60 HP	
Max pressure / pression maximale / <i>maximaler Druck</i>	8,0 Mpa	80 bar	1150 psi
Max flow rate / débit maximale / <i>maximale Durchflussrate</i>	800 lt/min	211 gpm	
Piston diameter / diamètre du piston / <i>Kolbendurchmesser</i>	4"1/2 - 114,3mm		
Stroke / Course / Hubweg	4" – 101,6 mm		
Maximum stroke rate / coup par minute / <i>max Hub pro Minute</i>	260 / min	260 spm	
Suction diameter / diamètre d'aspiration / <i>Saugdurchmesser</i>	3"	76,2 mm	
Output diameter / diamètre de sortie / <i>Ausgangsdurchmesser</i>	2"	50,8 mm	


STACKABLE FRAME

Bareshaft dimensions and weight

Width 615 mm - 2'	Height 450 mm - 1'5"	Lenght 1100 mm - 3'7"	Weight 900 Kg - 1984 lb
-------------------	----------------------	-----------------------	-------------------------

Frame dimensions and weight

Width 1400 mm - 4'7"	Lenght 2,460 mm - 8"	Height 1,490 mm - 5'	Weight 2.500 Kg - 5.500 lb
----------------------	----------------------	----------------------	----------------------------

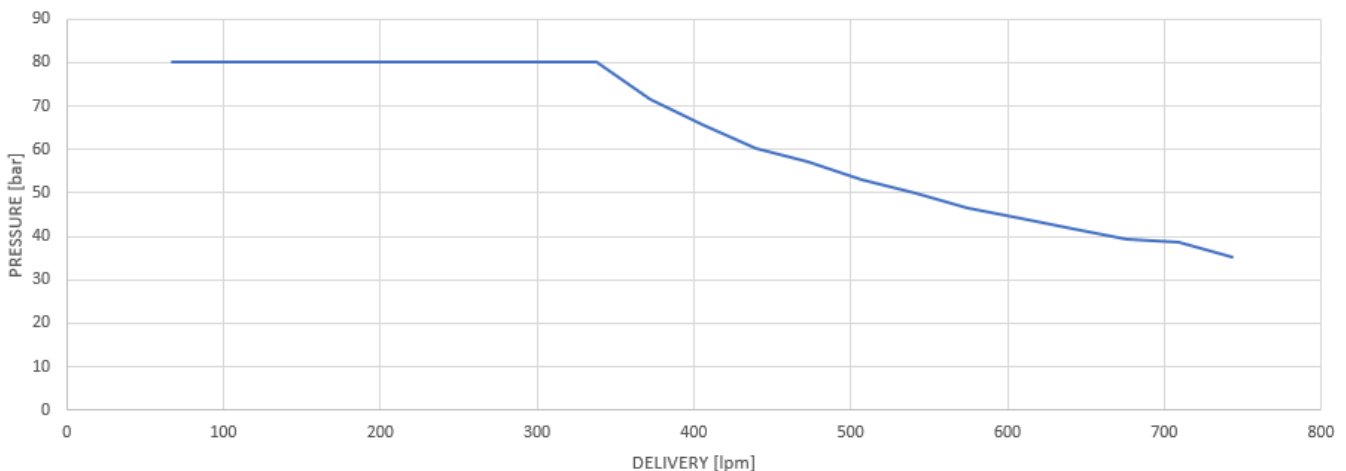

tecniwell

Via 1° Maggio, 35 – 29027 Podenzano (PC) – Italy – Tel. + 39 0523 524086
 e-mail: info@tecniwell.com – www.tecniwell.it

Data are indicative and subject to change without notice, the version shown may have particular features or options not included in the standard model

